COMANSA

LC-2074 — 26,450 lbs.

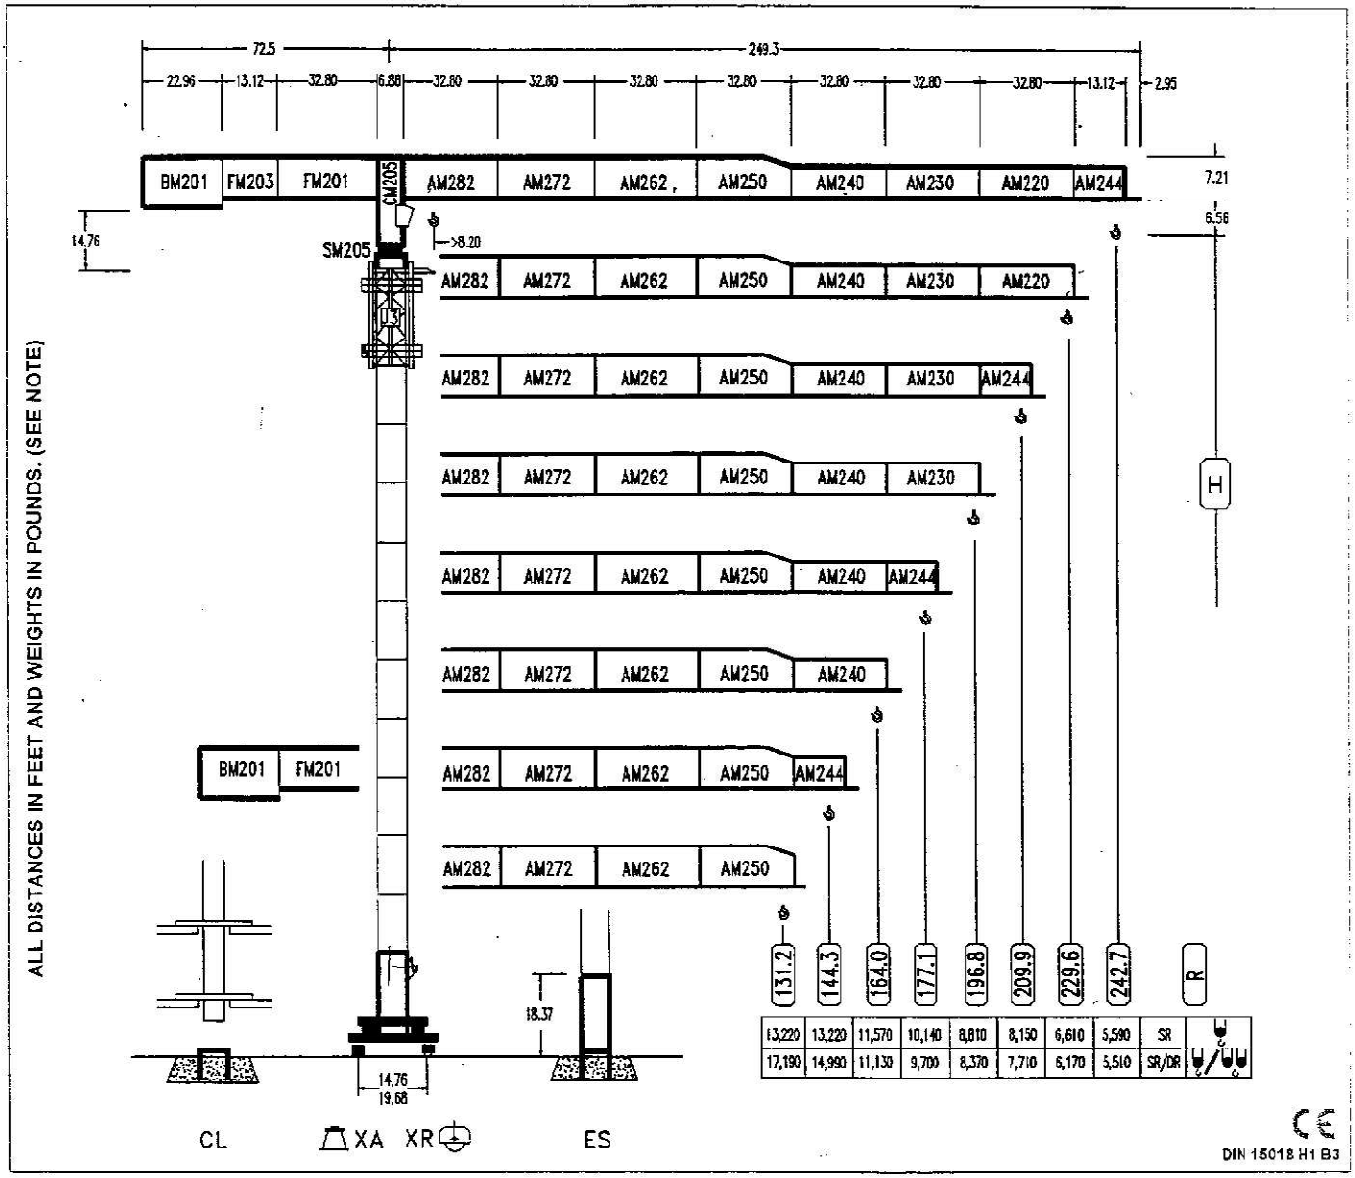

R		R(Cmax)	Cmax	98.4	111.5	131.2	144.3	164.0	177.1	196.8	209.9	229.6	242.7	(ft.)
242.7	SR	123.6	13,220	13,220	13,220	12,370	11,090	9,560	8,730	7,700	7,120	6,380	5,590	(lbs.)
	SR/DR	65.9	26,450	16,770	14,500	11,980	10,690	9,140	8,310	7,270	6,690	5,940	5,510	(lbs.)
229.6	SR	127.2	13,220	13,220	13,220	12,790	11,470	9,890	9,040	7,970	7,380	6,610	(lbs.)	
	SR/DR	67.9	26,450	17,320	14,990	12,390	11,060	9,470	8,610	7,540	6,940	6,170	(lbs.)	
209.9	SR	138.4	13,220	13,220	13,220	13,220	12,610	10,890	9,960	8,810	8,160	(lbs.)		
	SR/DR	73.4	26,450	19,000	16,470	13,640	12,190	10,470	9,530	8,370	7,720	(lbs.)		
196.8	SR	138.4	13,220	13,220	13,220	13,220	12,630	10,910	9,980	8,820	(lbs.)			
	SR/DR	73.4	26,450	19,020	16,480	13,650	12,200	10,480	9,540	8,380	(lbs.)			
177.1	SR	140.4	13,220	13,220	13,220	13,220	12,830	11,080	10,140	(lbs.)				
	SR/DR	74.4	26,450	19,310	16,740	13,870	12,400	10,650	9,700	(lbs.)				
164.0	SR	145.9	13,220	13,220	13,220	13,220	13,220	11,570	(lbs.)					
	SR/DR	77.4	26,450	20,130	17,450	14,480	12,950	11,130	(lbs.)					
144.3	SR	144.3	13,220	13,220	13,220	13,220	13,220	(lbs.)						
	SR/DR	87.2	26,450	23,160	20,120	16,720	14,990	(lbs.)						
131.2	SR	131.2	13,220	13,220	13,220	13,220	(lbs.)							
	SR/DR	89.5	26,450	23,790	20,670	17,200	(lbs.)							

SR/DR CHART ONLY

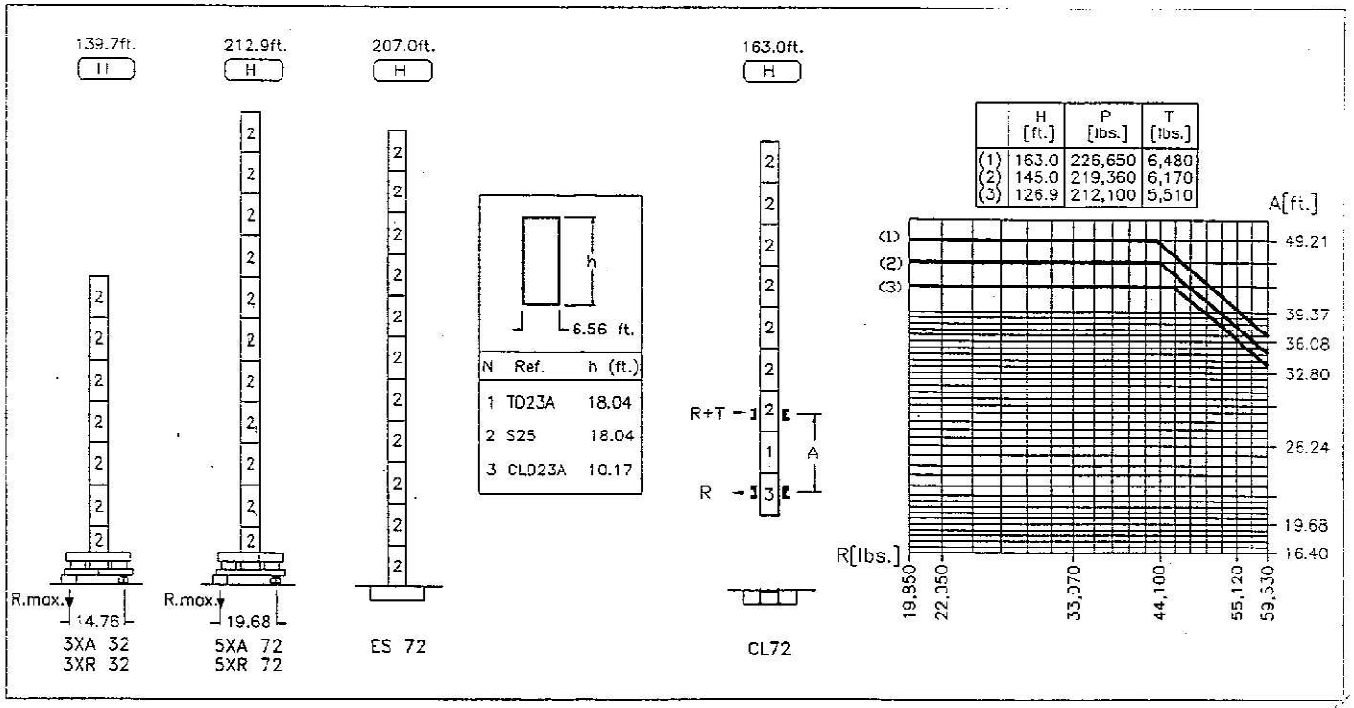

CS3-4.5	*CFU-5.5
7.2 hp (5.4 kW)	7.3 hp (5.5 kW)
51.1 ft./min 157.4 ft./min 314.9 ft./min	0 ⇨ 308 ft./min

GR-30
3 x 57.8 ft.lbs. (3 x 80 Nm)
0 ⇨ 0.7 rpm

TRA-6.5	*TRA-6.5VC
2 x 46.9 ft.lbs. (2 x 65 Nm)	
0 ⇨ 65.6 ft./min	

1,040 ft.

ES3-33-30

53.6 hp (40 kW)

		I	II	III
SR	ft./min	23.6	94.4	188.9
	lbs.	13,220	13,220	6,610
DR	ft./min	11.8	47.2	94.4
	lbs.	26,450	26,450	13,220

1,395 ft.

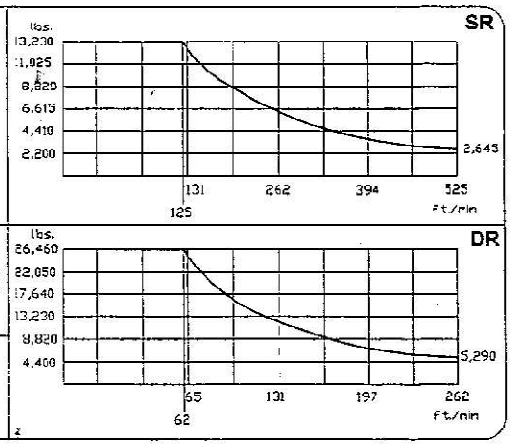

***EFU4-45-30**

60 hp (45 kW)

1,395 ft.

***EEA3-60-30**

96.5 hp (72 kW)

		I	II	III
SR	ft./min	11.8 ⇝ 177.1	19.6 ⇝ 291.3	47.2 ⇝ 708.6
	lbs.	13,220	6,610	2,640
DR	ft./min	5.9 ⇝ 88.5	9.8 ⇝ 145.6	23.6 ⇝ 354.3
	lbs.	26,450	13,220	5,290

1,040 ft.

***EPL2-45-30**

72.4 hp (54 kW)

		I	II	III	IV	V
SR	ft./min	19.6	39.3	149.6	224.4	299.2
	lbs.	13,220	13,220	13,220	6,610	6,610
DR	ft./min	9.8	19.6	74.8	110.2	149.6
	lbs.	26,450	26,450	26,450	13,220	13,220

Tensión de alimentación Operating voltage	480 V 3 ph 60 Hz
Sección de cable Cross section of cable — AWG nº	0 (3.5 x 50 mm²)

OPCIONAL
OPTIONAL *

R. máx.	En servicio In operation	3XR32 ..... 233,500 lbs. 5XR72 ..... 250,500 lbs.
R. máx.	Fuera de servicio Out of service	3XR32 ..... 199,100 lbs. 5XR72 ..... 331,400 lbs.

NOTE: ALL ORIGINAL WEIGHTS AND MEASUREMENTS ARE METRIC AND ABOVE ARE ROUNDED-OFF CONVERTIONS OF SAME.
FOR EXACT WEIGHTS AND MEASUREMENTS, SEE SHEET DS.9923.19 (02/00)

COMANSA

Construcciones Metálicas COMANSA S. A.
Polígono Industrial de Areta
E-31620 Huarte-Pamplona.- SPAIN
Tel.: (34) 948 335 020 - Fax: (34) 948 330 810
e-mail: info@comansa.com